


Power outlets (12 VDC)

Please use as a power supply for electronic goods that use less than 12 VDC/10 A (power consumption of 120 W).

When connecting multiple devices, make sure that the total power consumption of all the connected devices is less than 120 W.


■ Type A

Open the lid.

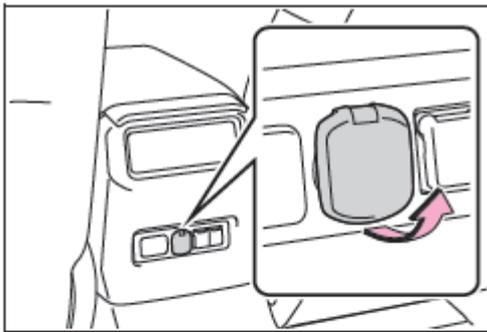

■ Type B (if equipped)

Open the lid.

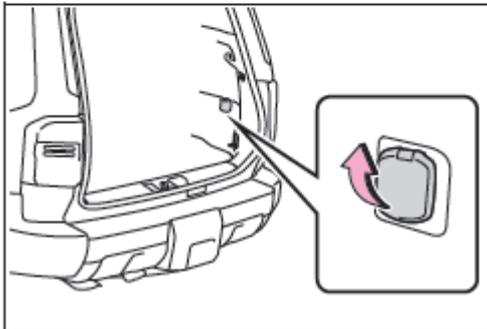

■ The power outlet can be used when

The engine switch is in ACC or ON.

■ When turning the engine switch off

Disconnect electrical devices with charging functions, such as mobile battery packs.

If such devices are left connected, the engine switch may not be turned off normally.

⚠ NOTICE

■ To avoid damaging the power outlet

Close the lid when the power outlet is not in use.

Foreign objects or liquids that enter the power outlet may cause a short circuit.


■ To prevent battery discharge

Do not use the power outlet longer than necessary when the engine is not running.

Power outlet (220 VAC) (if equipped)

Accessories that use less than 100 W.

Open the lid, and fully and securely insert the plug of the device into the power outlet.

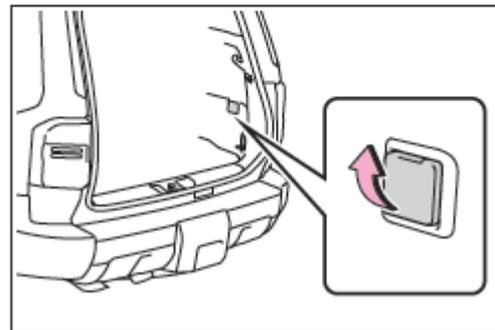

■ The power outlet can be used when

The engine switch is in ON.

■ Power outlet

Do not use a 220 VAC appliance that requires more than 100 W. If a 220 VAC appliance that consumes more than 100 W is used, the protection circuit will cut the power supply.

■ Appliances that may not operate properly (220 VAC)

The following 220 VAC appliances may not operate properly even if their power consumption is under 100 W.

- Appliances with high initial peak wattage
- Measuring devices that process precise data
- Other appliances that require an extremely stable power supply