

**Part Number: PT29A-60240-XX****Kit Contents**

Item #	Quantity Req'd.	Description
1	1	Molding, LH Front Door
2	1	Molding, LH Rear Door
3	1	Molding, RH Front Door
4	1	Molding, RH Rear Door

**Hardware Bag Contents**

Item #	Quantity Req'd.	Description
1		
2		

**Additional Items Required For Installation**

Item #	Quantity Req'd.	Description
1		
2		

**Conflicts**

None
------

**Recommended Tools**

<b>Personal &amp; Vehicle Protection</b>	<b>Notes</b>
Safety Glasses	
Vehicle Protection	
<b>Special Tools</b>	<b>Notes</b>
Roller	Hard Rubber Hand Roller, 1" to 3" wide.
Non intrusive Infrared Temp Probe/Gun	
<b>Installation Tools</b>	<b>Notes</b>
Flexible Scale or Tape Measure	
Masking Tape	2" wide
Clean Lint-free Cloths	
Straight Edge (Plastic)	
Heat Gun (if required to warm surfaces)	
Heat Source	
<b>Special Chemicals</b>	<b>Notes</b>
Simple Green All Purpose Cleaner	Dilute with equal amount of water to ½ Strength

**General Applicability**

Body Side Molding can be installed on all MY24 or later Land Cruiser models.

**Recommended Sequence of Application**

Item #	Accessory
1	Body Side Molding
2	Door Edge Guards

\*Mandatory

**Vehicle Service Parts** (may be required for reassembly)

Item #	Quantity Req'd.	Description

**Legend**

**STOP:** Damage to the vehicle may occur. Do not proceed until process has been complied with.



**OPERATOR SAFETY:** Use caution to avoid risk of injury.



**CAUTION:** A process that must be carefully observed in order to reduce the risk of damage to the accessory/vehicle and to ensure a quality installation.



**TOOLS & EQUIPMENT:** Used in Figures calls out the specific tools and equipment recommended for this process.



**REVISION MARK:** This mark highlights a change in installation with respect to previous issue.



**SAFETY TORQUE:** This mark indicates that torque is related to safety.

**Installation Procedure**

Care must be taken when installing this accessory to ensure damage does not occur to the vehicle. The installation of this accessory should follow approved guidelines to ensure a quality installation.

These guidelines can be found in the "Accessory Installation Practices" document.

This document covers such items as:-

- Vehicle Protection (use of covers and blankets, cleaning chemicals, etc.).
- Safety (eye protection, rechecking torque procedure, etc.).
- Vehicle Disassembly/Reassembly (panel removal, part storage, etc.).
- Electrical Component Disassembly/Reassembly (battery disconnection, connector removal, etc.).

Please see your Toyota dealer for a copy of this document.


**1. Vehicle Preparation**

- (a) Before working on the vehicle, cover the seats and carpets to protect from dirt and overspray of the wetting agent.



- (b) The work area, body side moldings, and vehicle door surface temperatures must be between 60°F and 90°F for optimum installation.

- (c) Saturate a clean lint-free cloth with cleaner and clean the areas of each door as shown in Fig. (1-1).

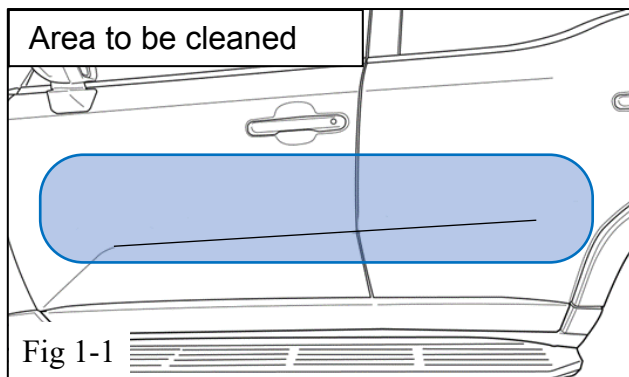


- (1) When cleaning with cleaner, follow the manufacturer's directions. Do not allow cleaner to air dry. NOTE: Cleaner should be diluted with water to ½ strength.

- (d) Wipe the cleaned surfaces with a clean, dry, lint-free cloth.




**NOTE:** Once cleaned do not contaminate this surface by touching it with your bare hands.

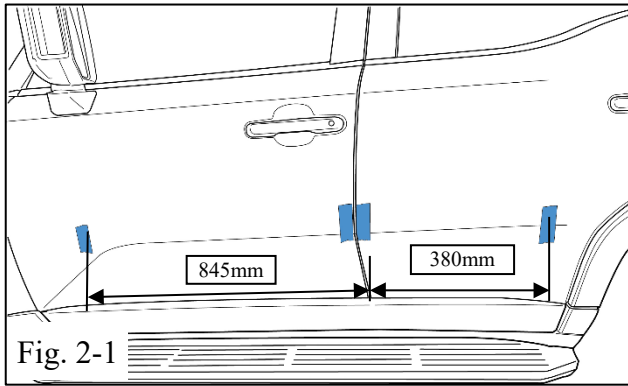


## 2. Alignment Tape Application


- (a) Measure 845mm forward from the rear edge of the front door along the top of the rocker molding and place a piece of vertical tape. Measure 380mm rearward from the front edge of the rear door along the top of the rocker molding and place a piece of vertical tape. Place pieces of vertical tape on both front and rear edges of the door gap also, as shown in Fig. 2-1.

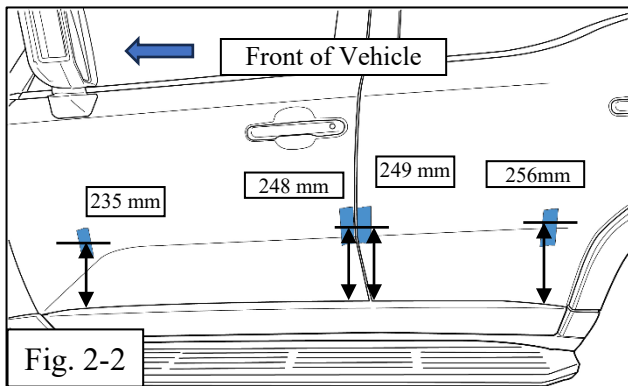

- (b) Measure up from the bottom of the door, place four vertical pieces of tape as shown (Fig. 2-2).


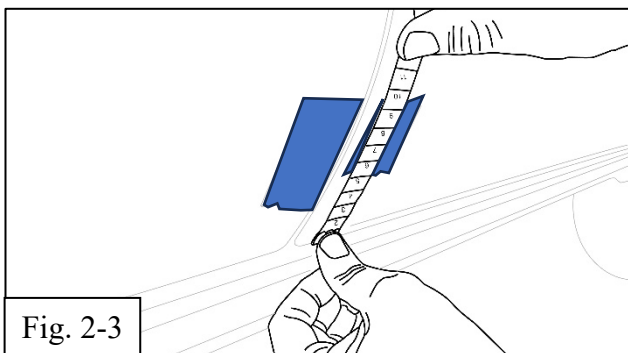


**NOTE:** When measuring the vertical measurements, be sure to measure up from the *bottom of the door along vehicle surface* as shown. (Fig 2-3).

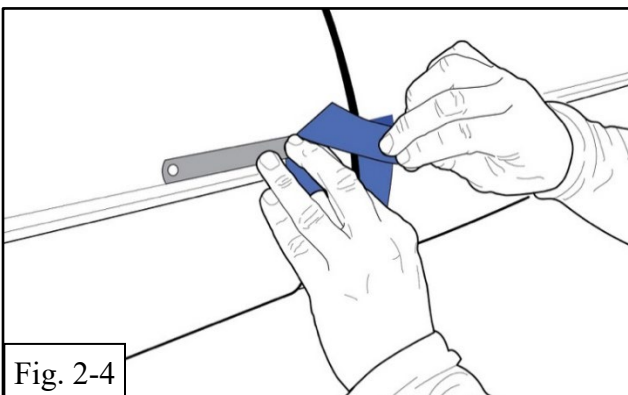

- (c) Use a straight edge to tear the vertical pieces of tape along the horizontal marks made in step 2b. Shown in Fig. 2-4 & 2-5.
- (d) A horizontal piece of tape can be placed across the top of tape segments on either side of the door gap.

- (e) Repeat Steps 2(a) to 2(c) for the other side of vehicle.

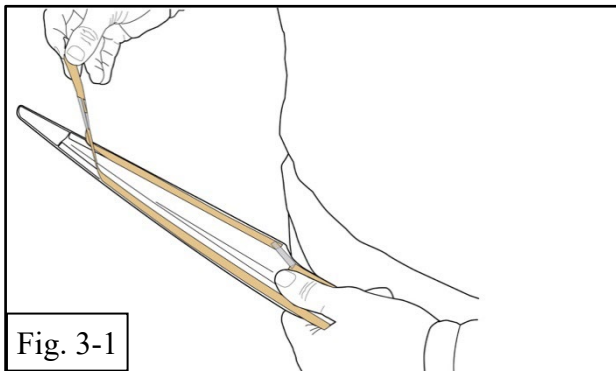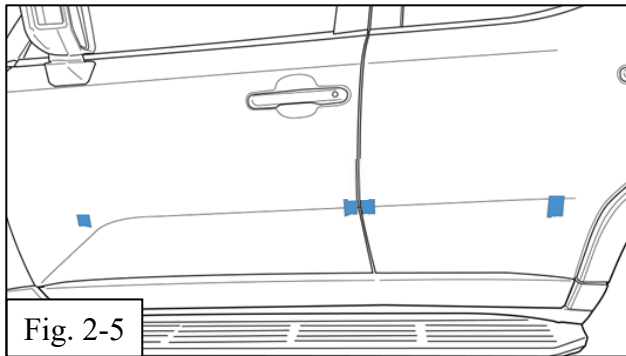


### 3. Body Side Molding Installation.




- (a) On the inside of each of the four moldings is identified as to their correct position on the vehicle. Start with the LH front door molding. While carefully holding the molding by its edges, pull the plastic tape at the end of the part to remove the orange release liner from the black acrylic foam tape strips. (Fig. 3-1)



**NOTE:** Once the release liner is removed from the molding, the surface of the foam tape must not be touched!

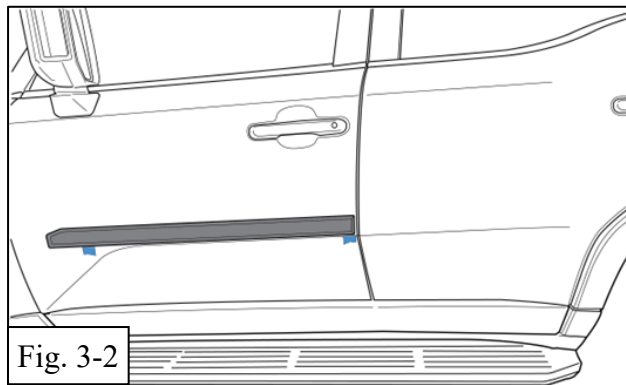

- (b) Hold the molding about 1/2" from the edge of the molding **9 mm** from the rear edge of the front door as shown in Fig. 3-2 and Fig 3-3. The rear bottom edge of the molding aligns vertically with the top edge of the vertical tape strip (see Fig. 3-2). The front portion of the molding aligns with the top edge of the tape strip at the front of the door. Once the molding is properly aligned, press it to the door surface starting at the rear and working toward the front with a rolling motion. Do not allow both ends to contact and stick to the door before the center contacts.

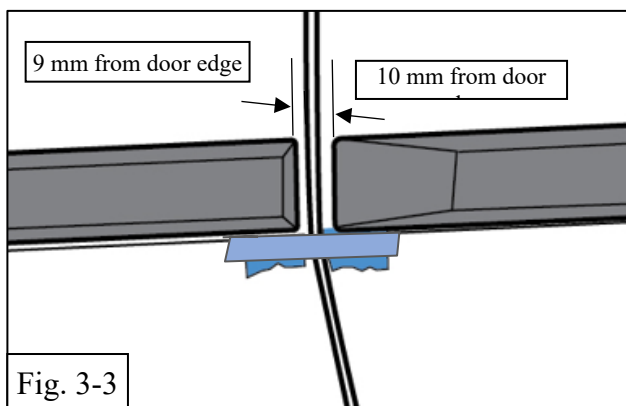

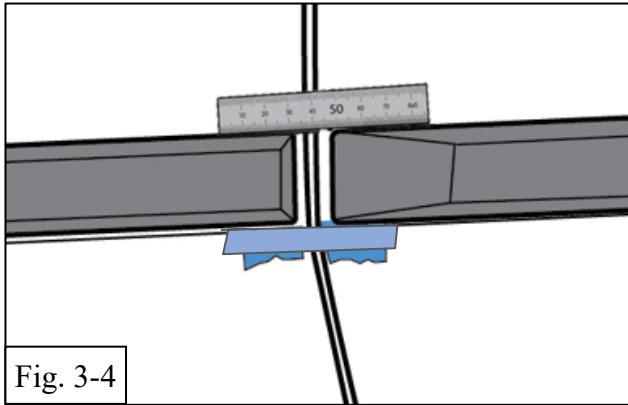


Fig. 3-4

- (c) Repeat steps 3-a and 3-b for the RH rear door molding placing the front edge of the molding **10 mm** from the door edge as shown in Fig. 3-3.



**NOTE:** A good way to ensure that where the rear and front molding meet between the doors align vertically is to hold a plastic straight edge against the top of the front molding and use it as a guide for the rear molding as shown in Fig. 3-4. Tolerance for alignment in the vertical direction of the front and rear molding in relation to each other is **0.0mm +/-1.0mm**.

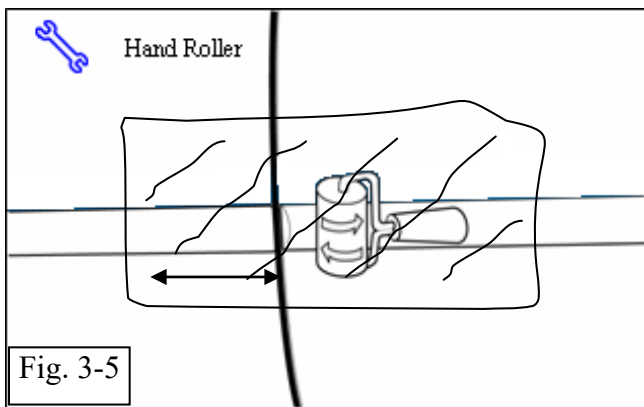


Fig. 3-5

Using the hand roller and lint free cloth, roll around the perimeter of the parts with firm pressure to ensure complete adhesion of the tape to the door surface. Use the cloth to protect the sheet metal and the molding. (Fig. 3-5)

- (d) Remove and discard all the tape strips.  
 (e) Repeat the entire installation procedure for the LH side of the vehicle.

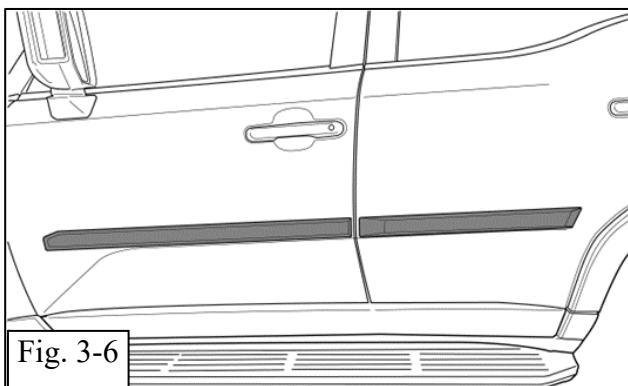


Fig. 3-6

**TOYOTA LAND CRUISER HV 2024 - BODY SIDE MOLDING**

Checklist - these points **MUST** be checked to ensure a quality installation.

Check:

Look For:

### Accessory Function Checks

- ☐
- Check visual alignment

The moldings should be visually straight.

The front edge of the rear moldings should be 9 mm away from the front edge of the rear door.

The inside rear edge of the front moldings should be 10 mm away from the rear edge of the front doors.

- ☐ Check for proper tape adhesion.

Confirm 100% tape adhesion completely around the part between the Body Side Molding and door sheet metal.

## Vehicle Function Checks

- ☐
- None Required

## Vehicle Appearance Checks

- ☐ After accessory installation and removal of protective cover(s), perform a visual inspection.

Ensure no damage (including scuffs and scratches) was caused during the installation process. (For PPO installation, refer to Accessory Quality Shipping Standard.)